

# SEG SKID PLATE



Picture #1




Kick Stand Assembly Instructions  
For I2 and X2 Segway:

1. Remove the 3 screws in Gear Box  
See Picture #2 and place  
Bracket see Picture #1 over Gear Box  
cover and re insert Screws.
2. Install Screws “A” & “B” with  
lock washer in top holes on kickstand

Picture #2



3. Adjust Length of Kick Stand with  
Screw “E”
4. Kick Stand Folds up for Gliding by  
Pushing up and to the left.

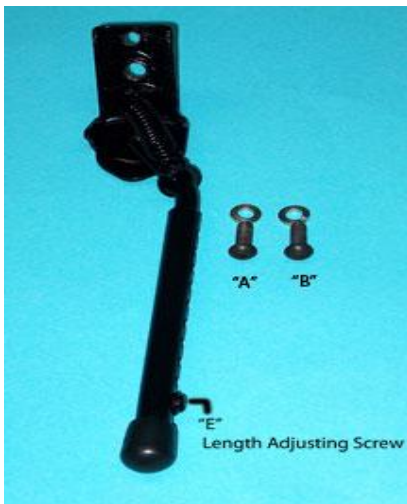

## **WARNING:**

**Never Ride your Segway with the Kickstand  
In the Down or Standing Position  
Make Certain That No attachments interfere  
With Safe operation of your Segway**

For Help Please Call (562)-577-2994  
Or Email: [cadavev@aol.com](mailto:cadavev@aol.com)